



EAVES FLASHING


Cladco Eaves Flashings are for installation with our Standing Seam Roofing Sheets with an eaves lip. These Flashings are designed to allow the lip on Standing Seam Sheets to securely clamp onto and seal your roofing project at the eaves, for a professional finish.






FLASHING SPECIFICATIONS	
Length	3m
Dimensions	200mm x 30mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT



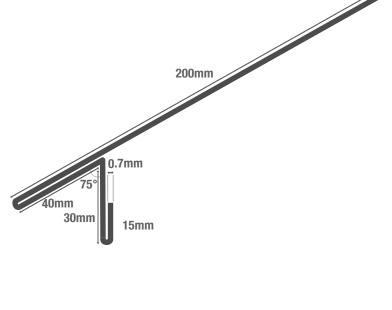



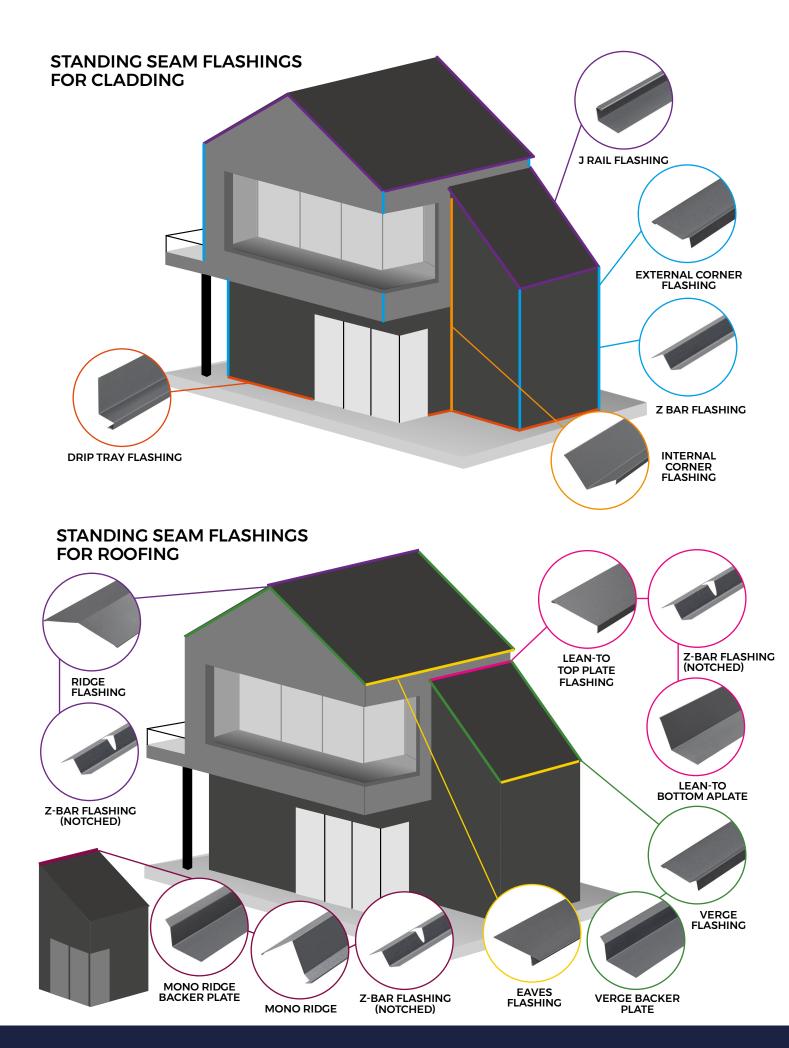



SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, Al fire-rated roofing and cladding product.

AFTERCARE

Standing Seam Roof Sheets are lowmaintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.











ACCESSORIES

Install your Eaves Flashing alongside a range of Standing Seam Flashings.



RESISTANCE

Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



GUARANTEE

Sheets have a long life span of up to 50 years.

PRODUCT ACCESSORIES





TIN SNIPS



CTI ADHESIVE AND SEALANT



ANNULAR RING NAILS



VENT 3 PRO BREATHABLE MEMBRANE

TOOLS REQUIRED



EAVES CLOSER



HANDHELD CIRCULAR SAW



RUBBER MALLET

For a full list of tools required, please refer to our Standing Seam Installation Guide.

