


STANDING SEAM

INTERNAL CORNER BARGE FLASHING


Cladco Internal Corner
Barge Flashings are used
in the application of our
Standing Seam Sheets
as cladding or roofing.
Our Internal Corner Barge
Flashings seal off your
internally facing corners,
to create a protected and
professional finish.

COLOUR RANGE






TEST CERTIFICATIONS	
Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)

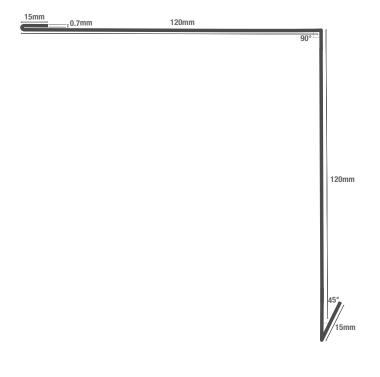



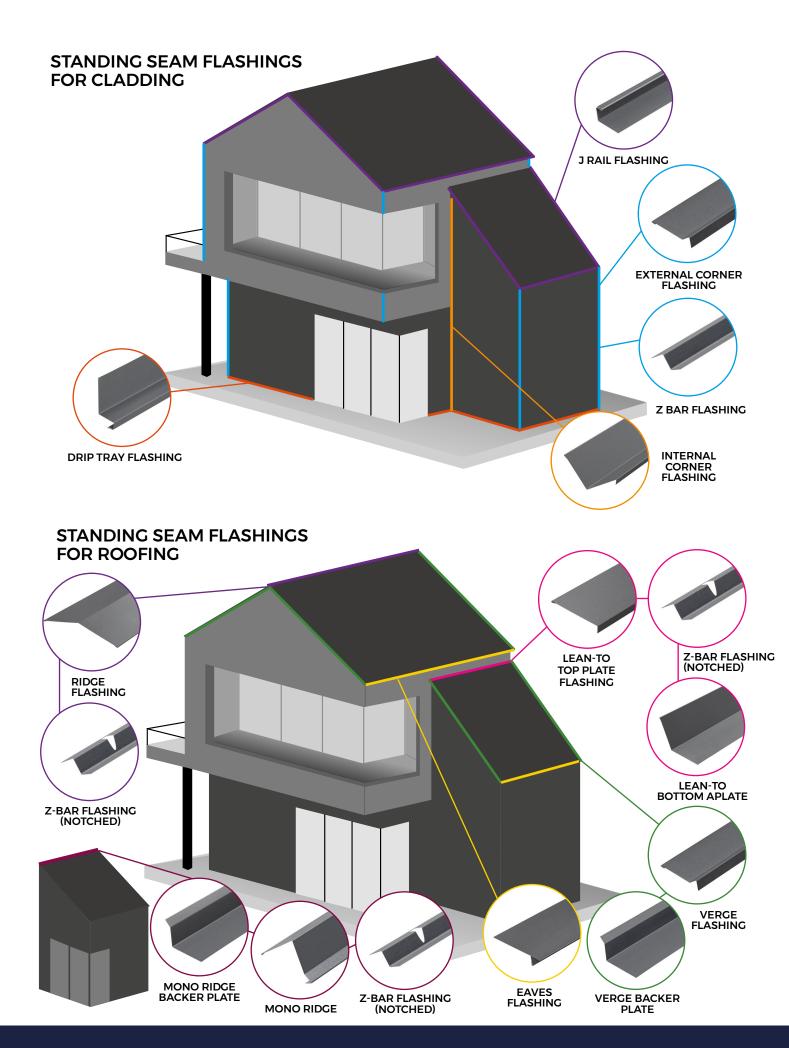


SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing
Sheets are manufactured from SSAB
Steel coated with GreenCoat® Pural
BT. The use of Swedish rapeseed oil,
in place of traditional fossil fuel oils,
promotes sustainable production
methods which reduce our
environmental footprint to provide
you with a high-quality, Al fire-rated
roofing and cladding product.


AFTERCARE

Standing Seam Roof Sheets and low-maintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

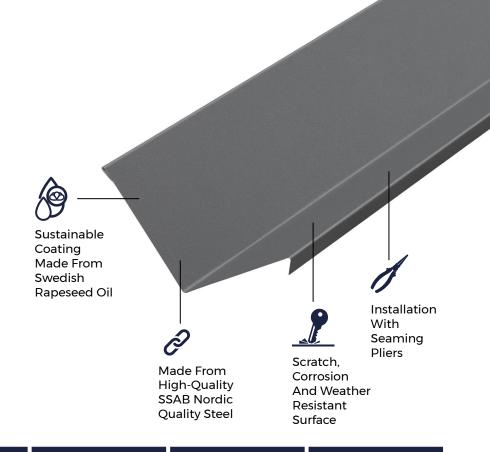









ACCESSORIES

Corner Barge Flashings are installed with Z-Bars and a range of our Standing Seam Flashings for a sleek finish.



RESISTANCE


Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



GUARANTEE

Sheets have a long life span of up to 50 years.

PRODUCT ACCESSORIES







TIN SNIPS



CTI ADHESIVE AND SEALANT



ANNULAR RING NAILS



VENT 3 PRO BREATHABLE MEMBRANE

TOOLS REQUIRED





HANDHELD CIRCULAR SAW



RUBBER MALLET

For a full list of tools required, please refer to our Standing Seam Installation Guide.





Z-BAR FLASHING


Cladco Z-Bar Flashings are used in the installation of our Standing Seam Sheets as side cladding. These Flashings provide a secure area for our Corner Barge Flashings to be clamped upon, leaving a professional finish.

COLOUR RANGE




FLASHING SPECIFICATIONS	
Length	3m
Dimensions	25mm x 29mm x 36mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT

TEST CERTIFICATIONS	
Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)





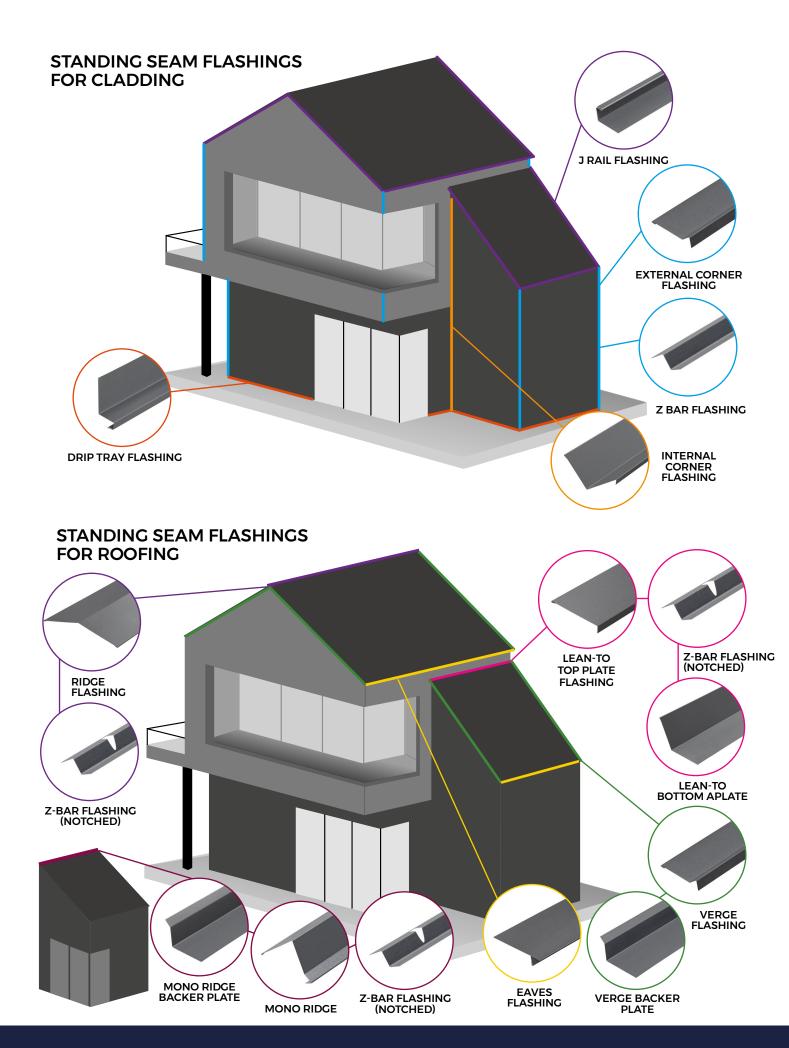




SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing
Sheets are manufactured from SSAB
Steel coated with GreenCoat® Pural
BT. The use of Swedish rapeseed oil,
in place of traditional fossil fuel oils,
promotes sustainable production
methods which reduce our
environmental footprint to provide
you with a high-quality, Al fire-rated
roofing and cladding product.

AFTERCARE

Standing Seam Roof Sheets are low-maintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

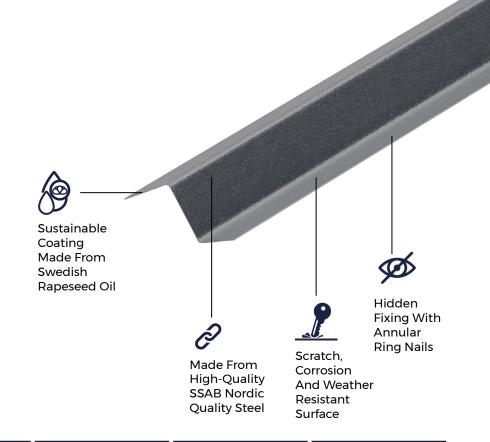





A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs.



ACCESSORIES

Our Z-Bar Flashings are installed prior to our Corner Barge Flashings and Internal Corner Barge Flashings for cladding applications.



RESISTANCE

Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.




GUARANTEE

Sheets have a long life span of up to 50 years.

PRODUCT ACCESSORIES



CORNER BARGE FLASHING



INTERNAL CORNER BARGE FLASHING



TIN SNIPS



ANNULAR RING NAILS



CTI ADHESIVE AND SEALANT

TOOLS REQUIRED





HANDHELD CIRCULAR SAW



RUBBER MALLET

For a full list of tools required, please refer to our Standing Seam Installation Guide.