

# **STANDING SEAM** LEAN-TO BOTTOM

PLATE FLASHING

Cladco Lean-To Bottom Plate Flashings are used with our Lean-To Top Plates and Z-Bar Flashings

(Notched) for a professional

finish on a lean-to roof made with our Standing

### **COLOUR RANGE**




#### FLASHING SPECIFICATIONS

Seam Sheets.


Length	3m
Dimensions	150mm x 150mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT

### TEST CERTIFICATIONS

Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)

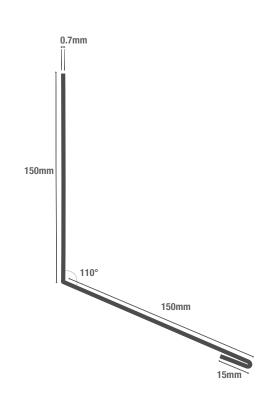



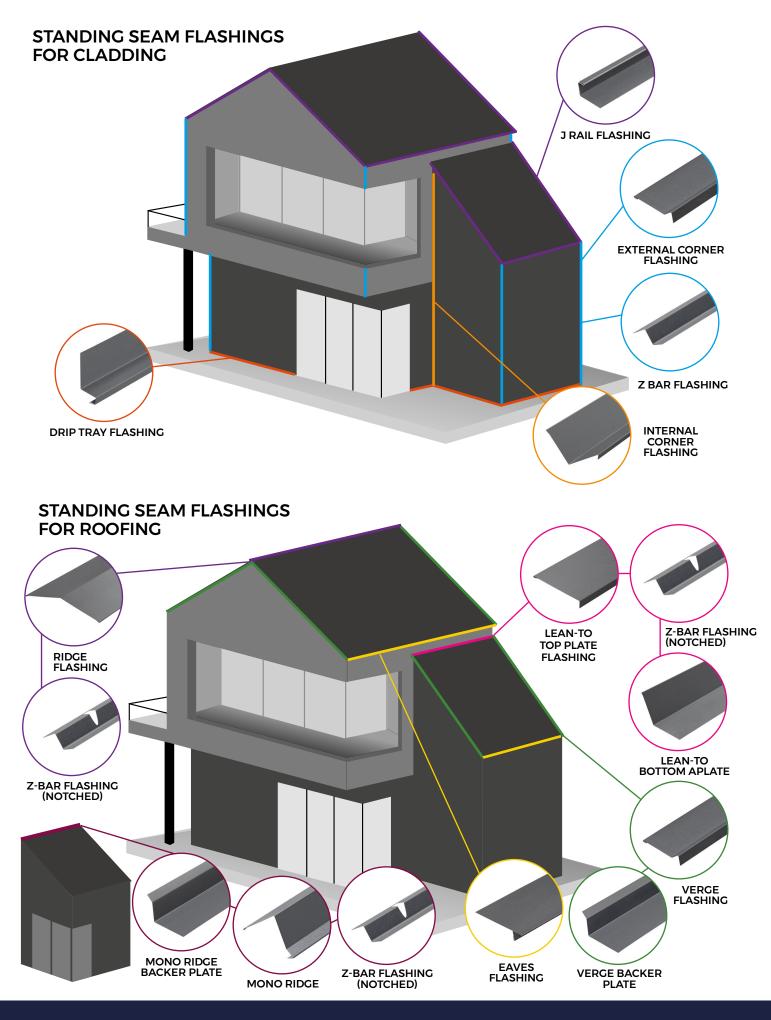



## SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, A1 fire-rated roofing and cladding product.

## AFTERCARE

Standing Seam Roof Sheets are low-maintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away. Sustainable Coating Made From Swedish Rapeseed Oil

> Made From High-Quality SSAB Nordic Quality Steel



Hidden Fixing with Annular Ring Nails

Ri Scratch, Corrosion And Weather Resistant Surface



MATERIALS

Nordic quality, sustainable SSAB steel promotes sustainable production.



A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs. ACCESSORIES

Install your Lean-To Bottom Plate with our Lean-To Top Plate & Z-Bar Flashing (Notched). Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



## **PRODUCT ACCESSORIES**



LEAN-TO TOP PLATE FLASHING



Z-BAR FLASHING (NOTCHED)



CTI ADHESIVE AND SEALANT



ANNULAR RING NAILS



VENT 3 PRO BREATHABLE MEMBRANE

**TOOLS REQUIRED** 











RUBBER MALLET

For a full list of tools required, please refer to our Standing Seam Installation Guide.





## **STANDING SEAM** LEAN-TO TOP PLATE FLASHING

Cladco Lean-To Flashings are used with our Lean-To Bottom Plates and Z-Bar Flashings (Notched) for a professional finish on a lean-to roof made with our Standing Seam Sheets.

## **COLOUR RANGE**



### FLASHING SPECIFICATIONS


Length	3m
Dimensions	150mm x 15mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT

### TEST CERTIFICATIONS

Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)





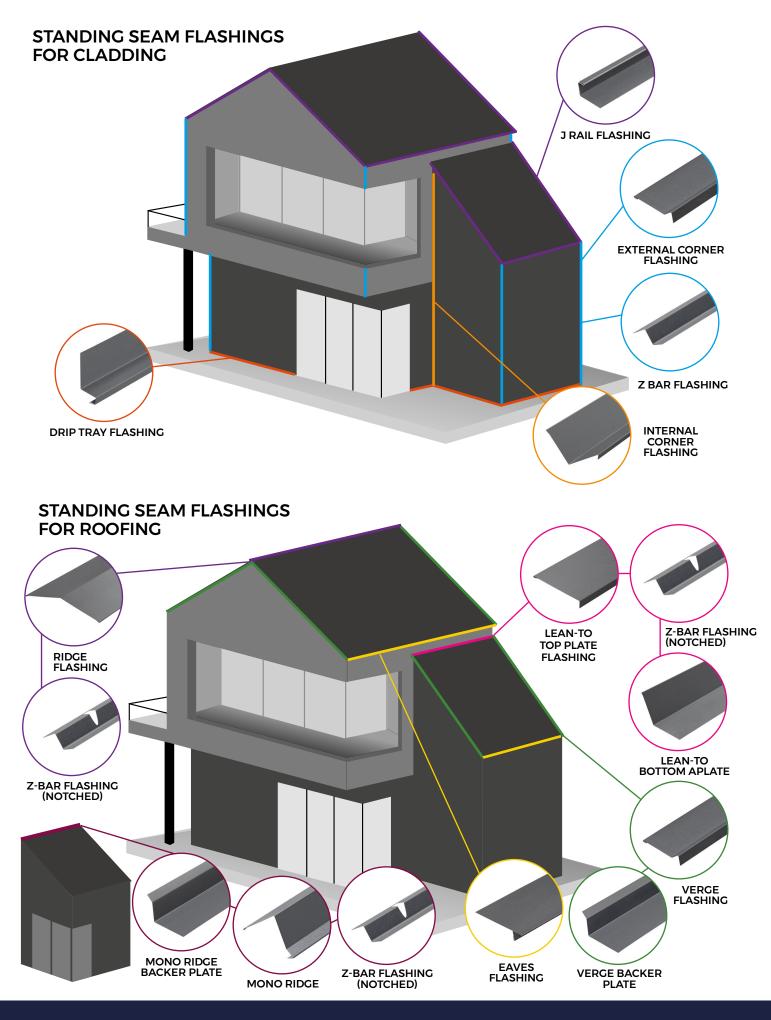



## SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, A1 fire-rated roofing and cladding product.

## AFTERCARE

Standing Seam Roof Sheets are lowmaintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

Sustainable Coating Made From Swedish Rapeseed Oil

> Made From **High-Quality** SSAB Nordic **Quality Steel**



Hidden Fixing with Annular **Ring Nails** 

Scratch, Corrosion And Weather Resistant

Surface





sustainable SSAB steel promotes sustainable production.



A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs.

ACCESSORIES

Install your Lean-To Top Plate with our Lean-To Bottom Plate & Z-Bar Flashing (Notched).




Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



long life span of up to 50 years.

## **PRODUCT ACCESSORIES**



LEAN-TO BOTTOM

PLATE FLASHING

**Z-BAR FLASHING** (NOTCHED)



**TIN SNIPS** 



ANNULAR RING NAILS



VENT 3 PRO BREATHABLE MEMBRANE

**TOOLS REQUIRED** 













For a full list of tools required, please refer to our Standing Seam Installation Guide.

