



LEAN-TO TOP PLATE FLASHING

Cladco Lean-To Flashings are used with our Lean-To Bottom Plates and Z-Bar Flashings (Notched) for a professional finish on a lean-to roof made with our Standing Seam Sheets.




COLOUR RANGE


NORDIC NIGHT BLACK	SLATE GREY	TILE RED	SILVER FIR GREEN

FLASHING SPECIFICATIONS			
Length	3m		
Dimensions	150mm x 15mm		
Thickness	0.7mm		
External Finish	GreenCoat® Pural BT		

TEST CERTIFICATIONS		
Quality	CE Marked (BS EN 14783:2013)	
Fire Rating	Class A1 (BS EN 13501)	

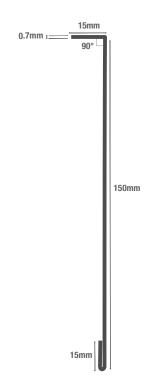



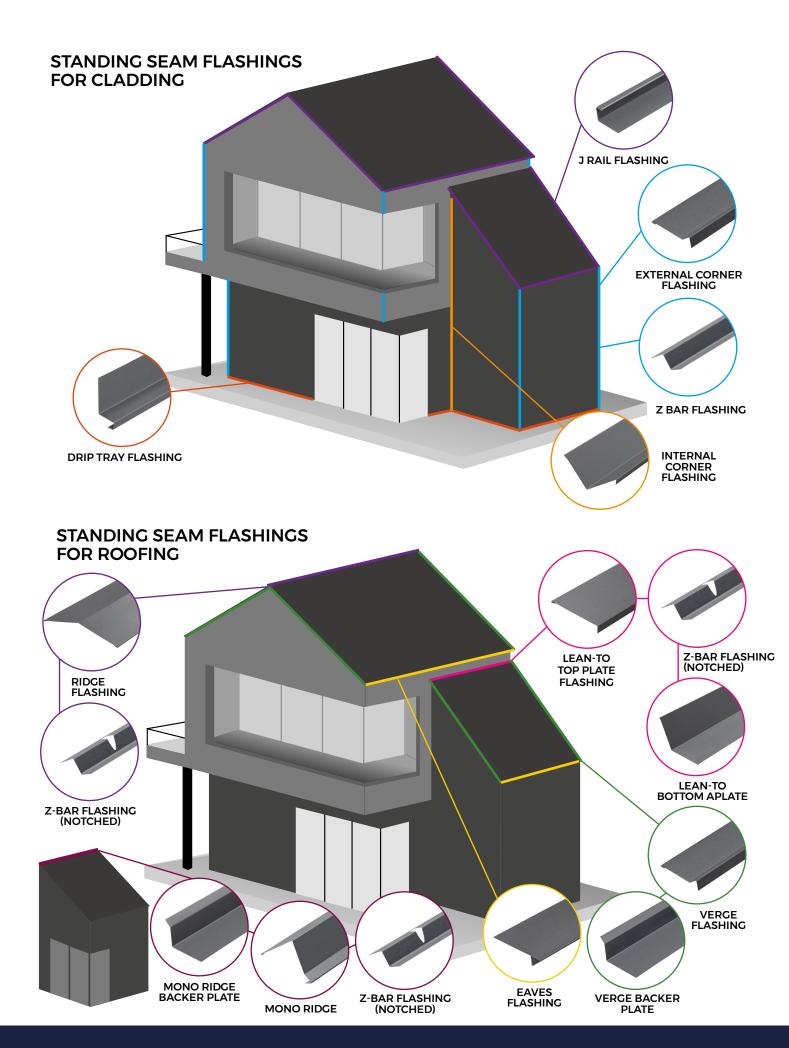




SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing
Sheets are manufactured from SSAB
Steel coated with GreenCoat® Pural
BT. The use of Swedish rapeseed oil,
in place of traditional fossil fuel oils,
promotes sustainable production
methods which reduce our
environmental footprint to provide
you with a high-quality, Al fire-rated
roofing and cladding product.

AFTERCARE

Standing Seam Roof Sheets are low-maintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

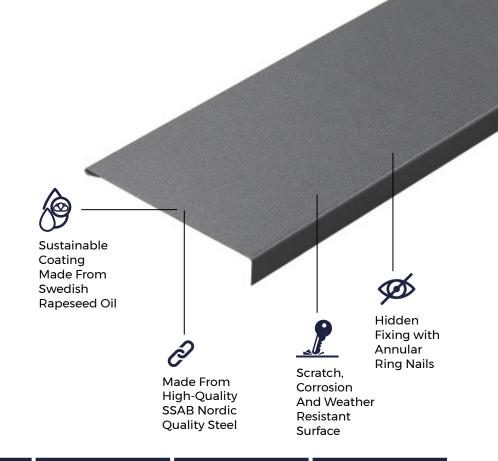



Nordic quality, sustainable SSAB steel promotes sustainable production.



SURFACES

A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs.



ACCESSORIES

Install your Lean-To Top Plate with our Lean-To Bottom Plate & Z-Bar Flashing (Notched).



RESISTANCE

Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



GUARANTEE

Sheets have a long life span of up to 50 years.

PRODUCT ACCESSORIES



LEAN-TO BOTTOM PLATE FLASHING



Z-BAR FLASHING (NOTCHED)



TIN SNIPS



ANNULAR RING NAILS



VENT 3 PRO BREATHABLE MEMBRANE

TOOLS REQUIRED



EAVES CLOSER



HANDHELD CIRCULAR SAW



RUBBER MALLET

For a full list of tools required, please refer to our Standing Seam Installation Guide.

