

STANDING SEAM RIDGE FLASHING

Cladco Ridge Flashings are designed to be installed on the top or your roof apex, where our Standing Seam Sheets met on an angle. Ridge Flashings provide protection from rain and debris damage and are installed with our Z-Bar Flashings.

COLOUR RANGE




FLASHING SPECIFICATIONS


Length	3m
Dimensions	185mm x 185mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT

TEST CERTIFICATIONS

Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)

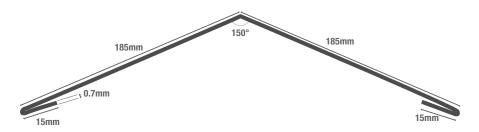



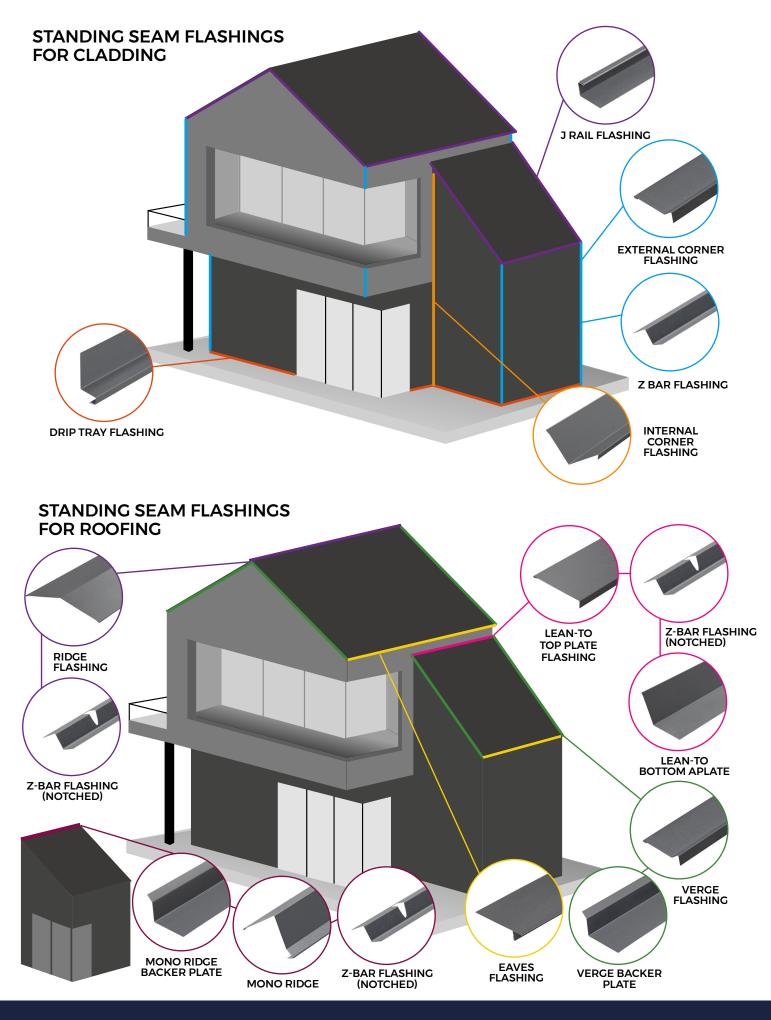



SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, A1 fire-rated roofing and cladding product.

AFTERCARE

Standing Seam Roof Sheets are lowmaintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away. Sustainable Coating Made From Swedish Rapeseed Oil



Made From High-Quality SSAB Nordic Quality Steel

RESISTANCE

Pural BT coated Sheets

are weather, corrosion,

scratch and UV

resistant.



Installation With Seaming Pliers

Scratch, Corrosion And Weather Resistant Surface



Sheets have a long life span of up to 50 years.

PRODUCT ACCESSORIES



Z-BAR FLASHING

MATERIALS

Nordic quality, sustainable SSAB steel

promotes sustainable

production.

C. H

SURFACES

A durable GreenCoat®

Pural BT coating with a

matt finish, with

or without ribs.

TIN SNIPS



ACCESSORIES

Install your Ridge Flashing

alongside Z-Bars and a

range of Standing Seam

Flashings.

CTI ADHESIVE AND SEALANT



ANNULAR RING NAILS

0

VENT 3 PRO BREATHABLE MEMBRANE

TOOLS REQUIRED











For a full list of tools required, please refer to our Standing Seam Installation Guide.







STANDING SEAM Z-BAR FLASHING


Cladco Z-Bar Flashings are used in the installation of our Standing Seam Sheets as side cladding. These Flashings provide a secure area for our Corner Barge Flashings to be clamped upon, leaving a professional finish.

COLOUR RANGE



FLASHING SPECIFICATIONS


Length	3m
Dimensions	25mm x 29mm x 36mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT



TEST CERTIFICATIONS

Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)



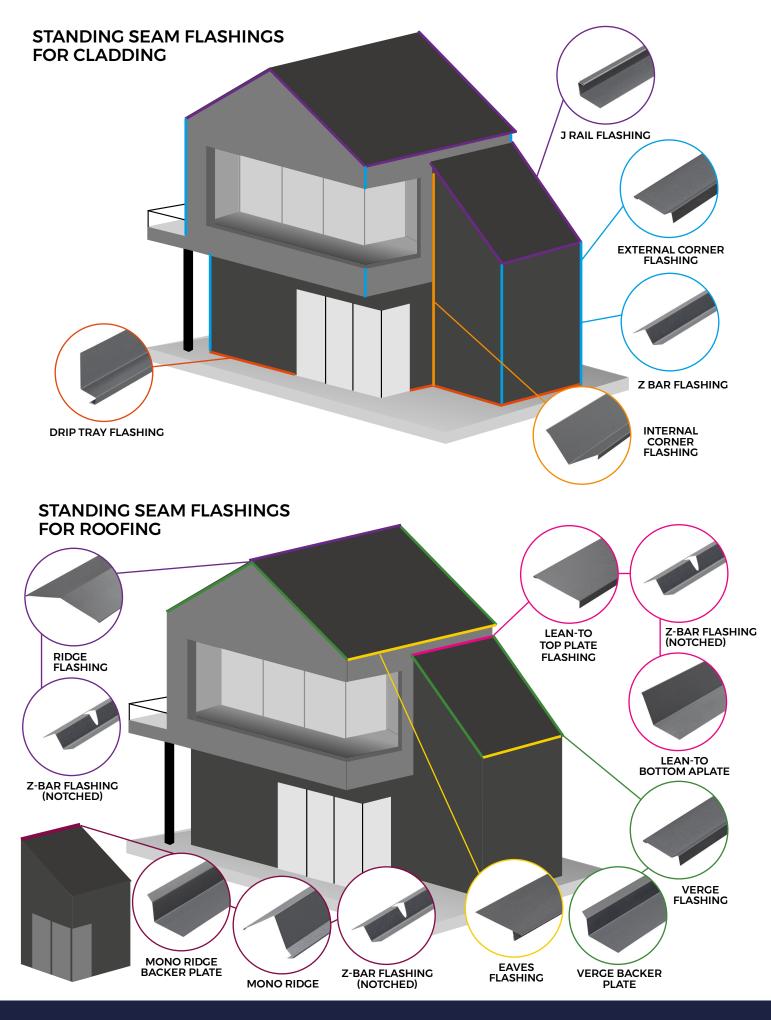



SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, A1 fire-rated roofing and cladding product.

AFTERCARE

MATERIALS

Nordic quality, sustainable SSAB steel

promotes sustainable

production.

Standing Seam Roof Sheets are lowmaintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

Sustainable Coating Made From Swedish Rapeseed Oil

> Made From **High-Quality** SSAB Nordic

> > RESISTANCE

Pural BT coated Sheets

are weather, corrosion,

scratch and UV

resistant.



Hidden **Fixing With** Annular **Ring Nails**

And Weather Surface

GUARANTEE Sheets have a

long life span of up to 50 years.

PRODUCT ACCESSORIES

SURFACES

A durable GreenCoat®

Pural BT coating with a

matt finish, with

or without ribs.



ACCESSORIES

Our Z-Bar Flashings are

installed prior to our Corner

Barge Flashings and Internal

Corner Barge Flashings for

cladding applications.

For a full list of tools required, please refer to our Standing Seam Installation Guide.

