

# STANDING SEAM

## RIDGE FLASHING

Cladco Ridge Flashings are designed to be installed on the top of your roof apex, where our Standing Seam Sheets meet on an angle. Ridge Flashings provide protection from rain and debris damage and are installed with our Z-Bar Flashings.

### COLOUR RANGE




FLASHING SPECIFICATIONS	
Length	3m
Dimensions	185mm x 185mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT


TEST CERTIFICATIONS	
Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)



## STANDING SEAM FLASHINGS FOR CLADDING

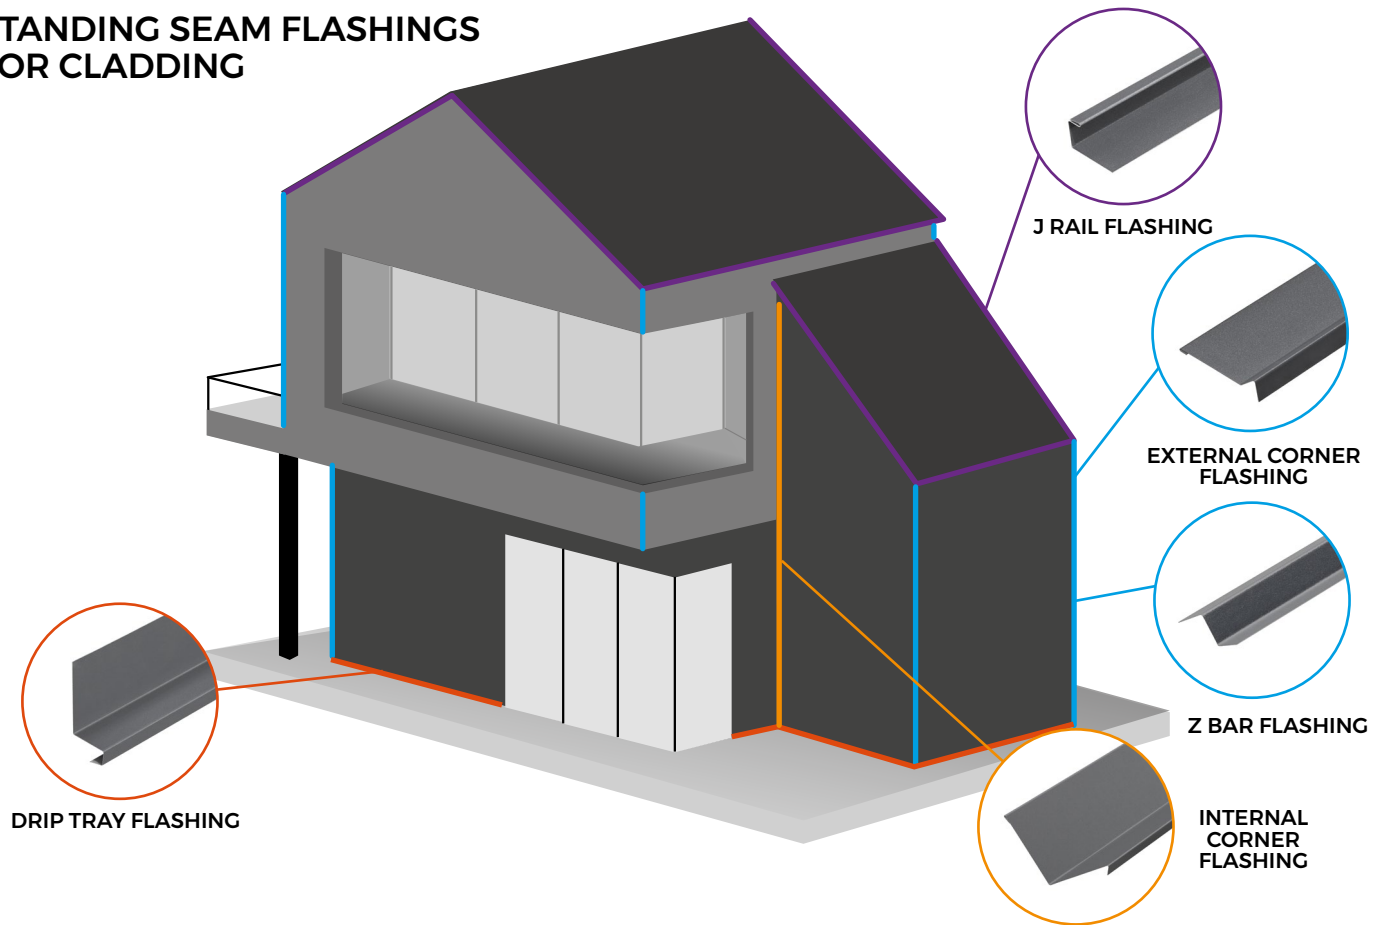

## STANDING SEAM FLASHINGS FOR ROOFING

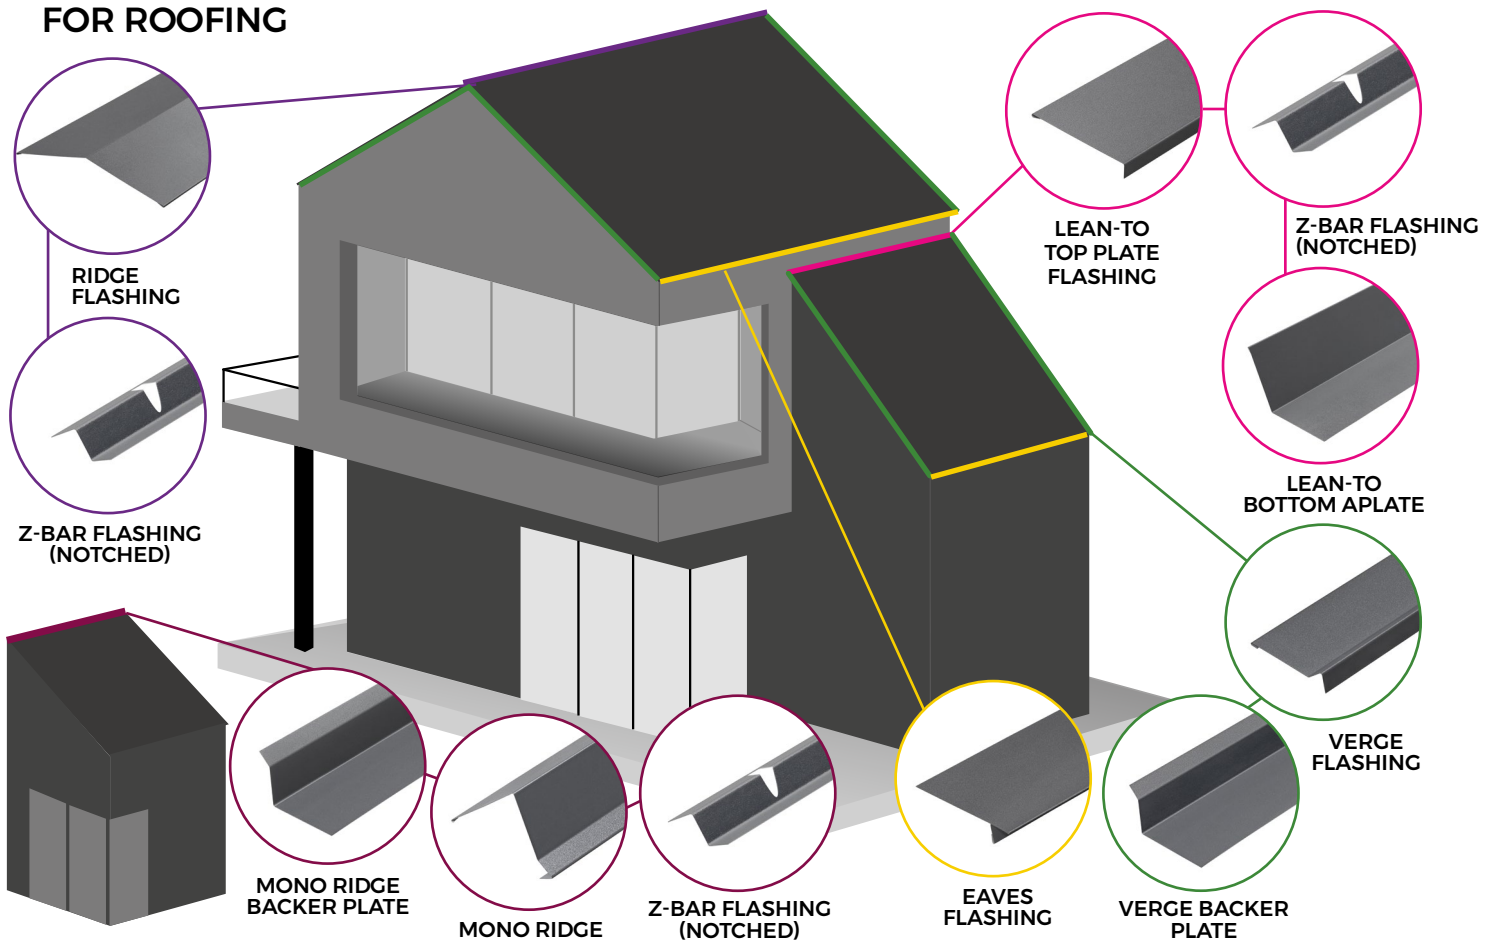







## SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, A1 fire-rated roofing and cladding product.
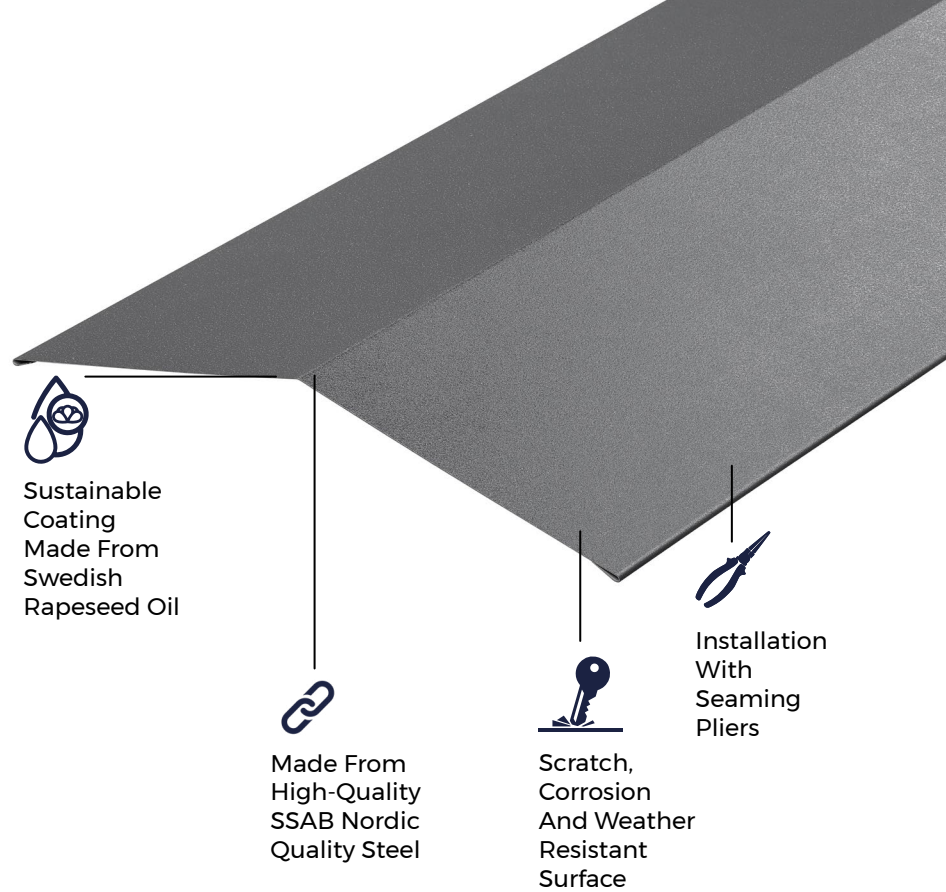
## AFTERCARE

Standing Seam Roof Sheets are low-maintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.



 <p><b>MATERIALS</b></p> <p>Nordic quality, sustainable SSAB steel promotes sustainable production.</p>	 <p><b>SURFACES</b></p> <p>A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs.</p>	 <p><b>ACCESSORIES</b></p> <p>Install your Ridge Flashing alongside Z-Bars and a range of Standing Seam Flashings.</p>	 <p><b>RESISTANCE</b></p> <p>Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.</p>	 <p><b>GUARANTEE</b></p> <p>Sheets have a long life span of up to 50 years.</p>
---	--	--	---	---

## PRODUCT ACCESSORIES



## TOOLS REQUIRED



For a full list of tools required, please refer to our Standing Seam Installation Guide.