


STANDING SEAM

VERGE FLASHING BACKER PLATE

Cladco Verge Flashing Backer Plates are used in conjunction with our Verge Flashings and Standing Seam Roofing Sheets. When installed alongside our Verge Flashings, Backer Plates create a seal on the ends of your roof which protects your building and provides a professional finish.

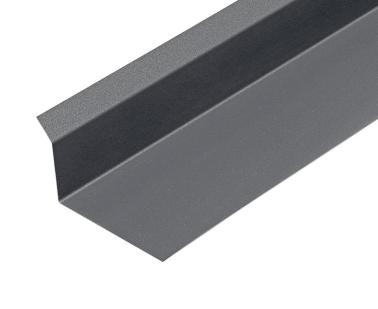


COLOUR RANGE


NORDIC NIGHT BLACK	SLATE GREY	TILE RED	SILVER FIR GREEN

FLASHING SPECIFICATIONS			
Length	3m		
Dimensions	90mm x 60mm x 23mm		
Thickness	0.7mm		
External Finish	GreenCoat® Pural BT		

TEST CERTIFICATIONS		
Quality	CE Marked (BS EN 14783:2013)	
Fire Rating	Class A1 (BS EN 13501)	

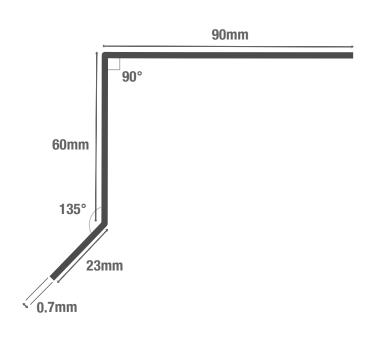



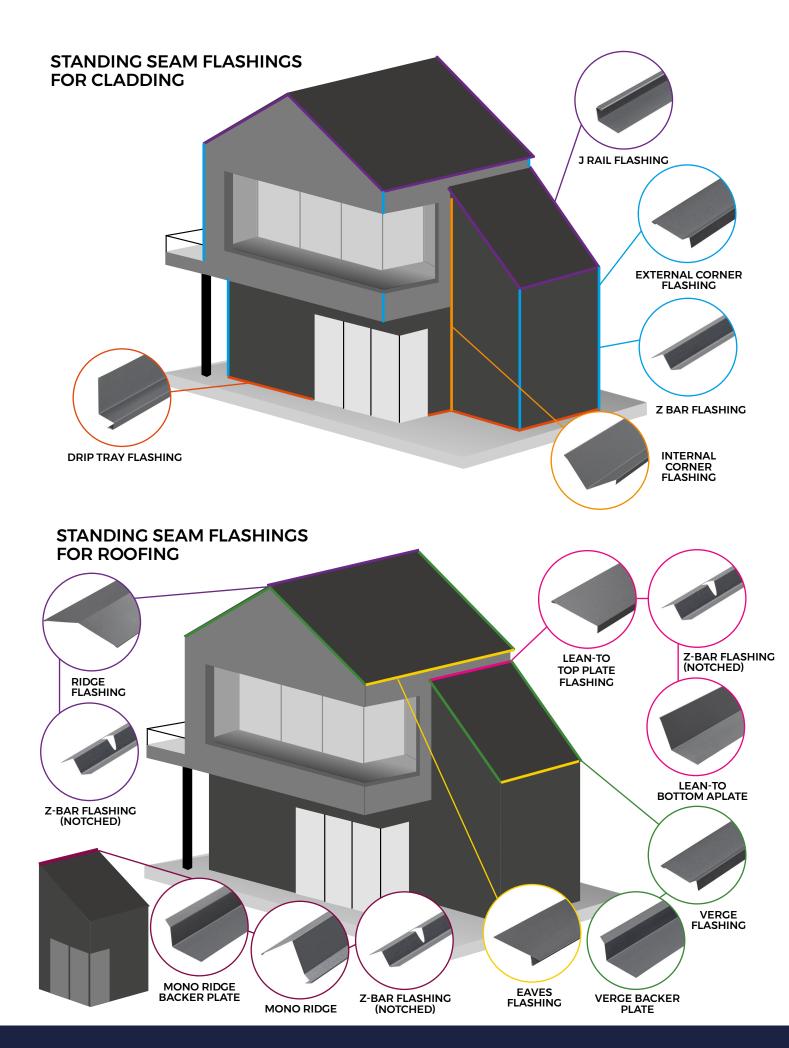




SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing
Sheets are manufactured from SSAB
Steel coated with GreenCoat® Pural
BT. The use of Swedish rapeseed oil,
in place of traditional fossil fuel oils,
promotes sustainable production
methods which reduce our
environmental footprint to provide
you with a high-quality, Al fire-rated
roofing and cladding product.

AFTERCARE

Standing Seam Roof Sheets are low-maintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

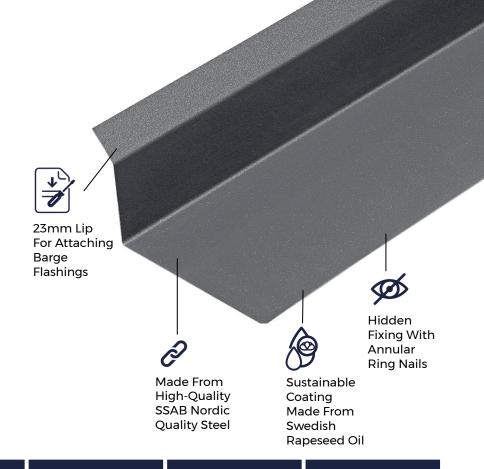



MATERIALS

Nordic quality, sustainable SSAB steel promotes sustainable production.



SURFACES

A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs.



ACCESSORIES

Install your Verge Flashing Backer Plate alongside a range of Standing Seam Flashings.



RESISTANCE


Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



GUARANTEE

Sheets have a long life span of up to 50 years.

PRODUCT ACCESSORIES







TIN SNIPS



CTI ADHESIVE AND SEALANT



ANNULAR RING NAILS



VENT 3 PRO BREATHABLE MEMBRANE

TOOLS REQUIRED





HANDHELD CIRCULAR SAW



RUBBER MALLET

For a full list of tools required, please refer to our Standing Seam Installation Guide.