

# **STANDING SEAM** VERGE FLASHING

Cladco Verge Flashings are used in conjunction with our Verge Flashing Backer Plates and Standing Seam Roofing Sheets. When installed alongside our Backer Plates, our Verge Flashings create a seal on the ends of your roof which protects your building and gives a professional finish.

### **COLOUR RANGE**




#### FLASHING SPECIFICATIONS

Length	3m
Dimensions	85mm x 25mm x 25mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT


#### TEST CERTIFICATIONS

Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)

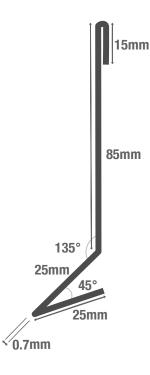





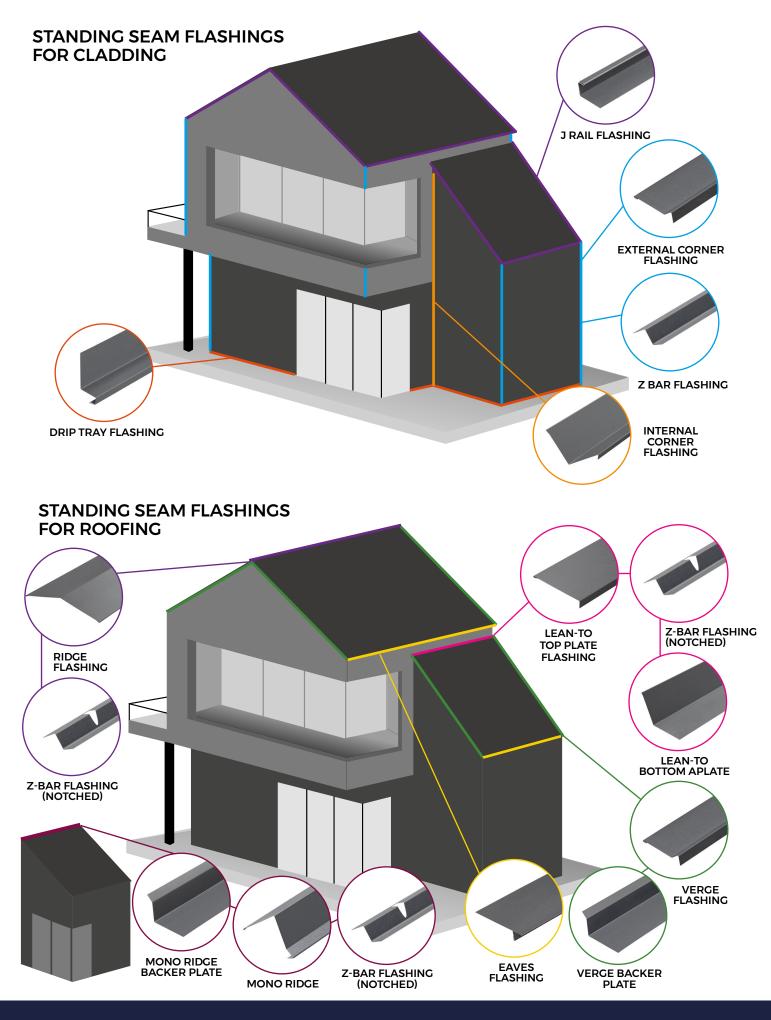



### SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, A1 fire-rated roofing and cladding product.

### AFTERCARE

Standing Seam Roof Sheets are lowmaintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

Sustainable Coating Made From Swedish Rapeseed Oil

> Made From **High-Quality** SSAB Nordic

> **Quality Steel**



Hidden Fixing with Annular **Ring Nails** 







sustainable SSAB steel promotes sustainable production.



A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs.

ACCESSORIES

Install your Verge Flashing alongside a range of Standing Seam Flashings.


# RESISTANCE

Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



long life span of up to 50 years.

### **PRODUCT ACCESSORIES**



VERGE FLASHING **BACKER PLATE** 

TAPE MEASURE



**TIN SNIPS** 



ANNULAR RING NAILS



**CTI ADHESIVE** AND SEALANT

**TOOLS REQUIRED** 



For a full list of tools required, please refer to our Standing Seam Installation Guide.





# **STANDING SEAM** VERGE FLASHING BACKER PLATE

Cladco Verge Flashing Backer Plates are used in conjunction with our Verge Flashings and Standing Seam Roofing Sheets. When installed alongside our Verge Flashings, Backer Plates create a seal on the ends of your roof which protects your building and provides a professional finish.

### COLOUR RANGE



#### FLASHING SPECIFICATIONS

CERTIFICATIONS

TEST

Quality

Fire Rating

Length	3m
Dimensions	90mm x 60mm x 23mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT

# 90mm 60mm 135° 23mm 0.7mm




### www.cladco.co.uk **T:** 01837 659901 **E:** info@cladco.co.uk

CE Marked (BS EN

Class A1 (BS EN 13501)

14783:2013)

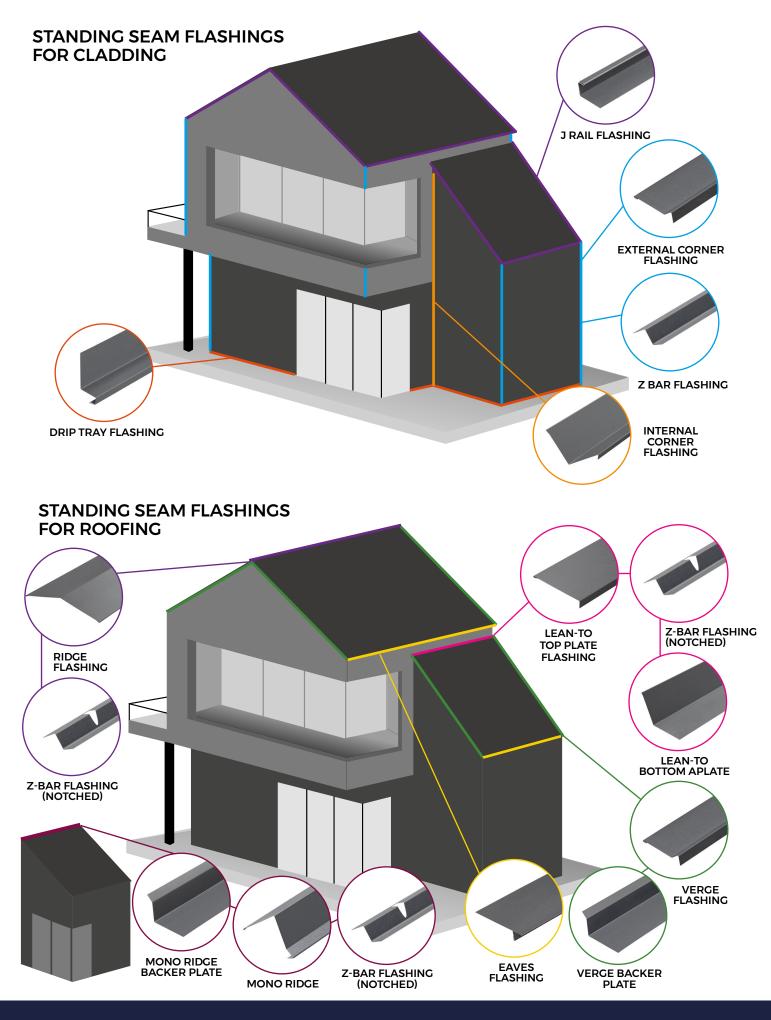



### SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing Sheets are manufactured from SSAB Steel coated with GreenCoat® Pural BT. The use of Swedish rapeseed oil, in place of traditional fossil fuel oils, promotes sustainable production methods which reduce our environmental footprint to provide you with a high-quality, A1 fire-rated roofing and cladding product.

### **AFTERCARE**


Standing Seam Roof Sheets are lowmaintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

23mm Lip For Attaching Barge Flashings



Hidden **Fixing With** Annular **Ring Nails** 



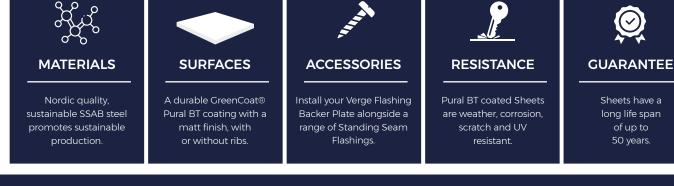

## **PRODUCT ACCESSORIES**



VERGE FLASHING



TIN SNIPS



CTI ADHESIVE AND SEALANT



ANNULAR RING NAILS



Sheets have a

long life span

of up to

50 years.

VENT 3 PRO BREATHABLE MEMBRANE

**TOOLS REQUIRED** 







Made From

**High-Quality** 

SSAB Nordic

**Quality Steel** 



For a full list of tools required, please refer to our Standing Seam Installation Guide.

