

Cladco Ridge Flashings are designed to be installed on the top or your roof apex, where our Standing Seam Sheets met on an angle. Ridge Flashings provide protection from rain and debris damage and are installed with our Notched Z-Bar Flashings.


NORDIC SLATE GREY TILE RED SILVER FIR GREEN

FLASHING SPECIFICATIONS	
Length	3m
Dimensions	220mm x 220mm
Thickness	0.7mm
External Finish	GreenCoat® Pural BT

TEST CERTIFICATIONS	
Quality	CE Marked (BS EN 14783:2013)
Fire Rating	Class A1 (BS EN 13501)





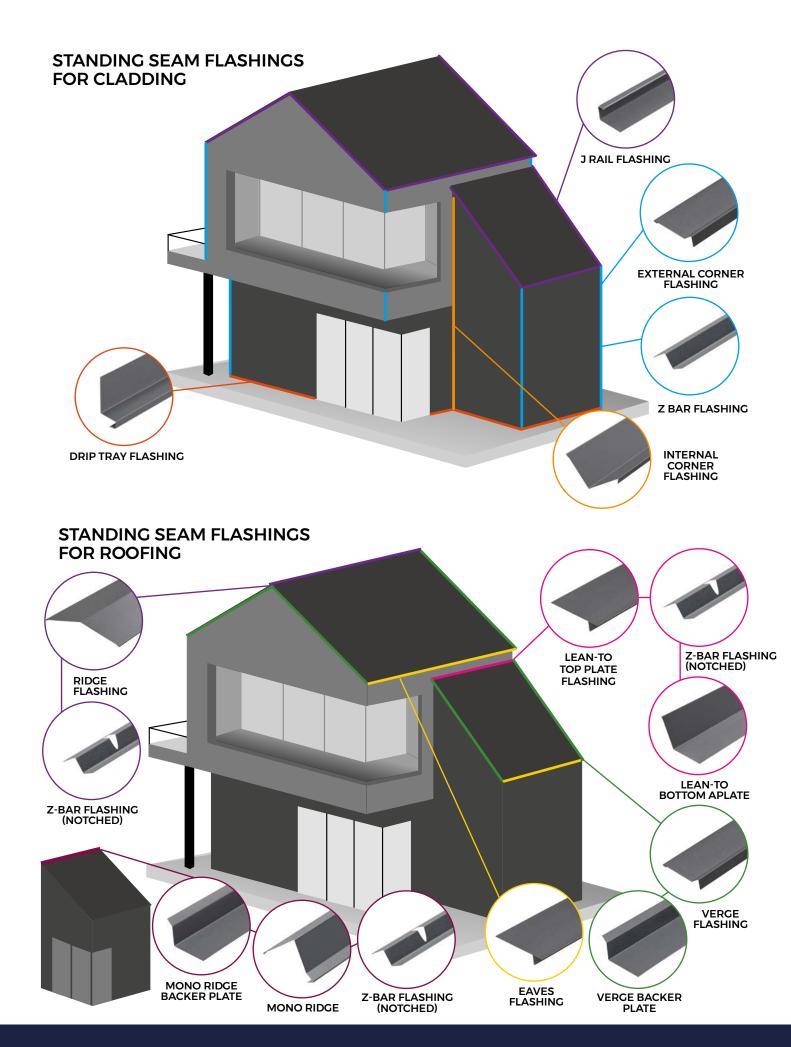




SUSTAINABLE MATERIALS

Cladco Standing Seam Roofing
Sheets are manufactured from SSAB
Steel coated with GreenCoat® Pural
BT. The use of Swedish rapeseed oil,
in place of traditional fossil fuel oils,
promotes sustainable production
methods which reduce our
environmental footprint to provide
you with a high-quality, A1 fire-rated
roofing and cladding product.

AFTERCARE

Standing Seam Roof Sheets are low-maintenance and require little in the way of upkeep. We recommend, however, that annual inspection of the Sheeting is carried out, and any debris or dirt build up is removed or cleaned away.

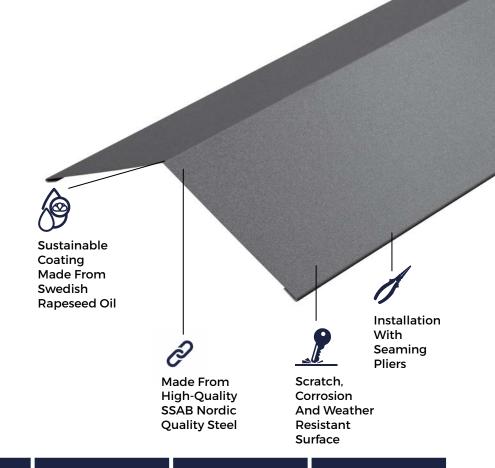



MATERIALS

Nordic quality, sustainable SSAB steel promotes sustainable production.



SURFACES

A durable GreenCoat® Pural BT coating with a matt finish, with or without ribs.



ACCESSORIES

Install your Ridge Flashing alongside Z-Bars and a range of Standing Seam Flashings.



RESISTANCE

Pural BT coated Sheets are weather, corrosion, scratch and UV resistant.



GUARANTEE

Sheets have a long life span of up to 50 years.

PRODUCT ACCESSORIES



Z-BAR FLASHING (NOTCHED)



TIN SNIPS



CTI ADHESIVE AND SEALANT



ANNULAR RING NAILS



VENT 3 PRO BREATHABLE MEMBRANE

TOOLS REQUIRED





HANDHELD CIRCULAR SAW



RUBBER MALLET

For a full list of tools required, please refer to our Standing Seam Installation Guide.

